

ThinRibbon

WALLRIBBON



ThinRibbon

WALLRIBBON

ThinRibbon wooden slat panel with the unique design that you can see the pattern of the wood grain going over one or more slats means that you get a real wood feeling in the room you put the panel in. The pattern of the wood together with the narrow grooves between the wooden slats gives this acoustic panel a harmonious feeling. Our acoustic felt RecoSilent as a base also makes the environment where it is placed quieter. With a low weight of 1.8kg/sqm and only 6mm thick, this wooden slat panel offers many advantages in handling, assembly, transport etc. The flexibility of the acoustic panel ThinRibbon is outstanding when it comes to flexibility as the veneer sits directly on the acoustic felt, the thin profile means that it fits perfectly against door and floor moldings without going outside and no extra adaptations when it comes to contacts, switches, etc. Our standard range offers the ThinRibbon panels in two different wooden slats widths.

THINRIBBON

Ribbon-Wood is part of the Wallsystems by Glimakra of Sweden product portfolio. We are a Swedish company with value-driving factors such as Scandinavian acoustic design, greater flexibility and higher quality. Based on these, we create favorable sound landscapes for different types of environments. With broad knowledge and long experience, we develop and manufacture products in our own factories in Glimåkra and Tranås. We are the largest in Sweden in wood veneer and through an ongoing collaboration with several prominent designers, we are always at the forefront when it comes to acoustic design.

INFORMATION

Surface layer	0.6mm veneer
Surface treatment	Lacquered or untreated.
Acoustic felt	Black RecoSilent (RS), 5.4mm recycled PET.
Thickness	6 mm.
Sizes	2400x523mm or 2800x523mm. Can be cut for surcharge.
Assembly	Staple gun or glued (0.5/panel) easily in place.
Manufacturing	Tranås and Vittaryd.

SUSTAINABILITY

The product meets Möbelfakta's requirements for the environment and responsible supply chains.

PRESCRIPTION TEXT

ThinRibbon, White Diamond Oak black RecoSilent, 2400x522mm

FIRE PROPERTIES

Standard range:	
Acoustic felt	B-s1,d0
Wooden slats	D-s2,d0
Varnish	D-s2,d0



Patent Pending: 23215913.7



CERTIFICATE

Acoustics SS-EN ISO 354: 2003 evaluated according to SS-EN ISO 11654: 1997. Test report no.44-77-M8. Date: 2025-09-04
(Acoustics workshop, laboratory accredited by Swedack)

Mounting directly to wall	Report 44-77-M9	w 0.25(MH)	Absorption class E
Mounting with 40mm PU foam	Report 44-77-M8	w 0.95(MH)	Absorption class A

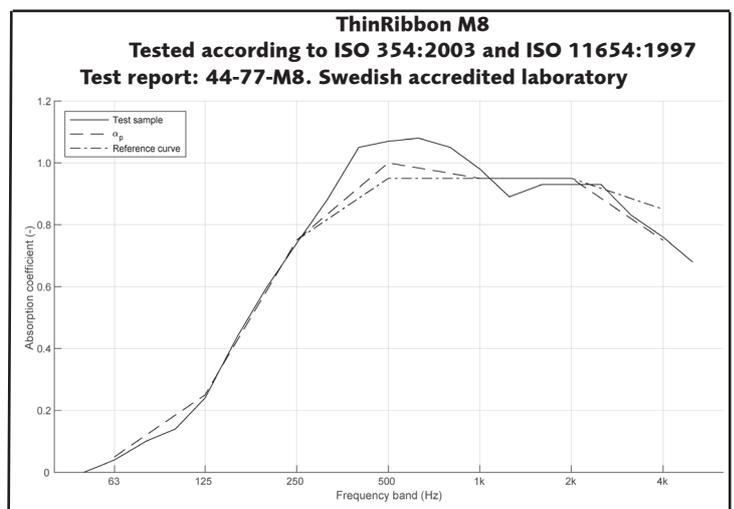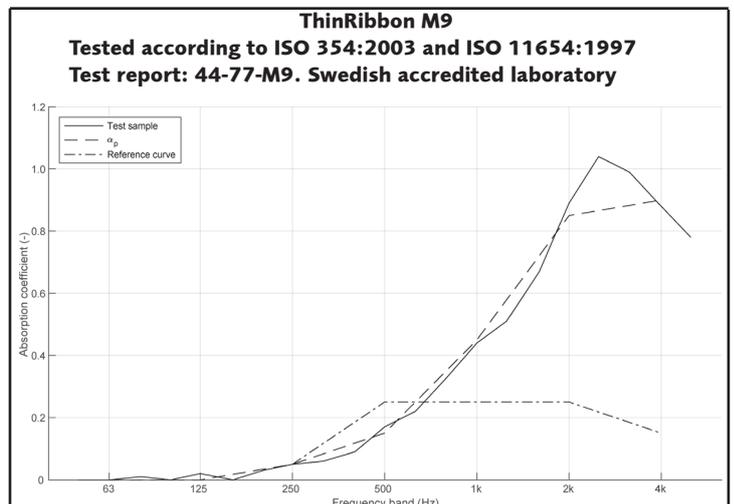

Equivalent absorption area per m² screen area (m²S/m²)

ThinRibbon

WALLRIBBON

OUR STANDARD RANGE



White Diamond Oak 23mm
RS black



White Diamond Oak 48mm
RS black



Macchiato Walnut 23mm
RS black



Macchiato Walnut 48mm
RS black




Cottage Oak 23mm
RS black



Cottage Oak 48mm
RS black

DIMENSIONS

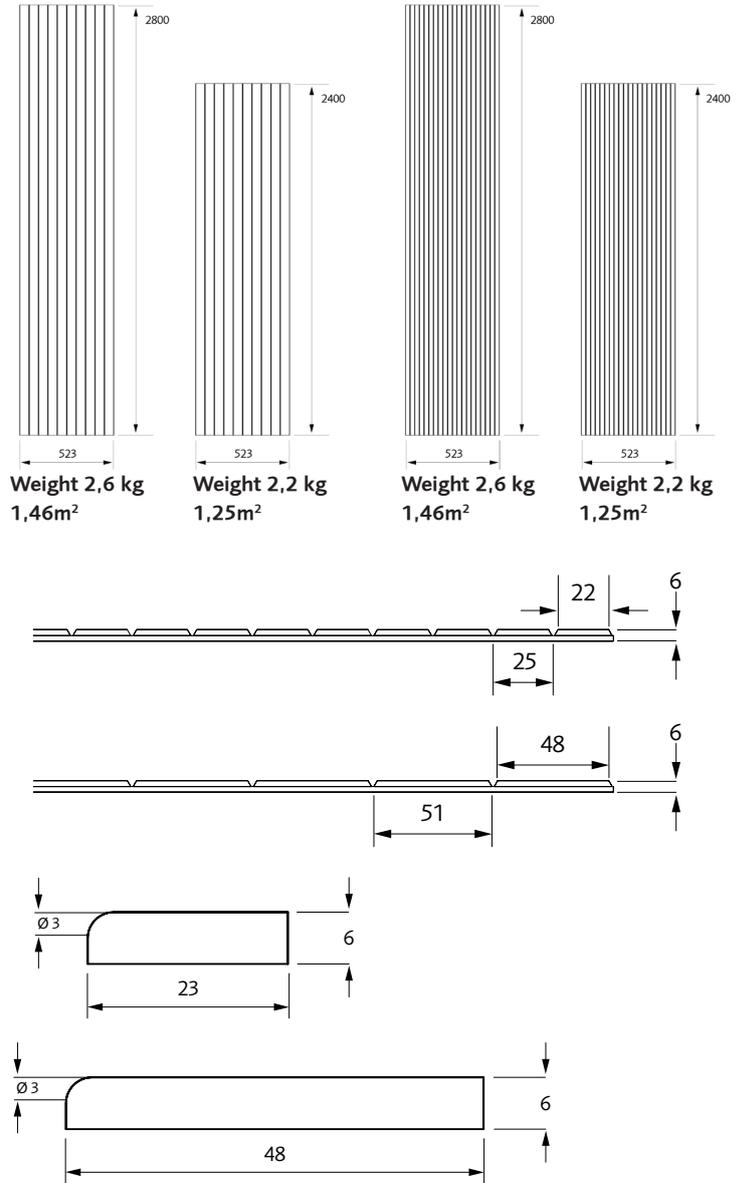

ACCESSORIES



ThinRibbon Glue



ThinRibbon Ruler



ThinRibbon End slat
23mm



ThinRibbon End slat
48mm

ThinRibbon

WALLRIBBON



ThinRibbon

WALLRIBBON

