

# Ribbon-Wood

# WALLRIBBON



Ribbon-Wood is an acoustic panel consisting of ribs with veneered MDF that sits on an acoustic blanket, Recosilent. A large selection of veneers from our own production, as well as several options among surface treatments, together with black and light gray Recosilent means that the options are many for you to find a rib panel that suits you. In addition to our standard range, we can also solve most things in terms of wood type, size, surface treatment or other adaptations you may be interested in.

## RIBBON-WOOD

Ribbon-Wood is part of the Wallsystems by Glimakra of Sweden product portfolio. We are a Swedish company with value-driving factors such as Scandinavian acoustic design, greater flexibility and higher quality. Based on these, we create favorable sound landscapes for different types of environments. With broad knowledge and long experience, we develop and manufacture products in our own factories in Glimåkra and Tranås. We are the largest in Sweden in wood veneer and through an ongoing collaboration with several prominent designers, we are always at the forefront when it comes to acoustic design.

## INFORMATION

Surface layer	0.6 mm Veneer.
Surface treatment	Stained or untreated.
Sheet material	12 mm standard or solid black MDF
Acoustic blanket	RecoSilent, 9mm recycled PET. Black or light gray.
Thickness	22 mm
Sizes	2400x600mm or 2960x600mm. Can be cut for extra.
Mounting	Screw (15pcs / panel) or glued (0.5 / panel) easily in place.
Manufacturing	Tranås and Glimåkra

## SUSTAINABILITY

The product meets Möbelfakta's requirements for the environment and responsible supply chains.

## PRESCRIPTION TEXT

Ribbon-Wood, Classic Oak black RecoSilent, 2400x600mm

## FIRE PROPERTIES

Standard range:

Acoustic blanket	RecoSilent Bs1-d0
Wooden slats	Ds2-d0

FR (FR = Fireclass)

Acoustic blanket RecoSilent	Bs1-d0
Wooden slats	Ds2-d0




Prescription text at FR: Ribbon-Wood, Article number + FR

Ex. Wall system, Classic Oak black RecoSilent, 2400x600mm, FR

## CERTIFICATE

Acoustics SS-EN ISO 354: 2003 evaluated according to SS-EN ISO 11654: 1997. Test report no. 21-755-R1. Date: 2021-12-09  
(Acoustics workshop, laboratory accredited by Swedack)

Mounting directly to wall	Report 21-755-M1	w 0.35 (MH) Absorption class D
Mounting with 45mm air gap	Report 21-755-M2	w 0.6 (MH) Absorption class C
Mounting with 45mm mineral wool	Report 21-755-M3	w 1.0 Absorption class A

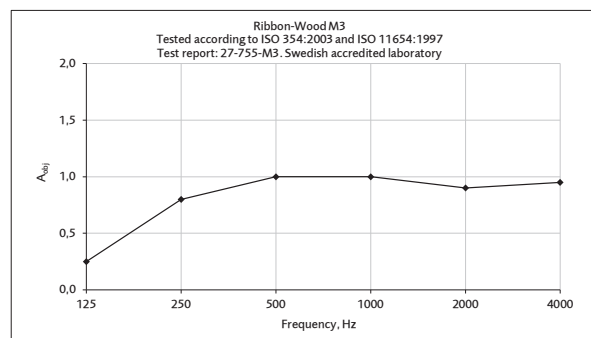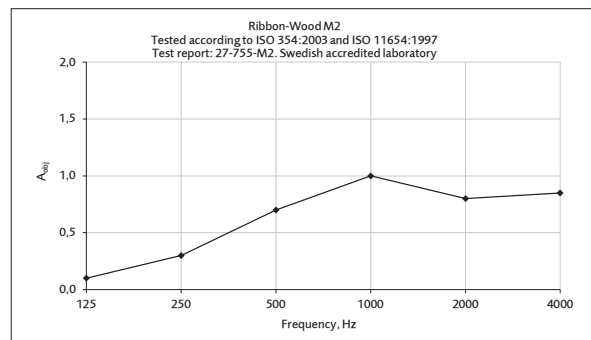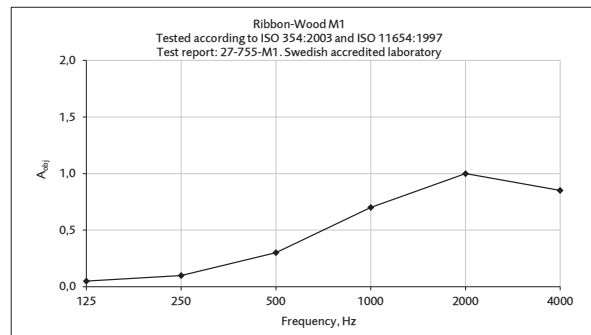


Equivalent absorption area per m<sup>2</sup> screen area (m<sup>2</sup>S / m<sup>2</sup>)

# Ribbon-Wood

# WALLRIBBON


## MEASURE

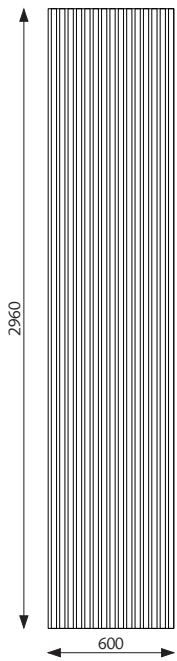


Weight 13kg  
Area 1.78m<sup>2</sup>




Weight 11kg  
Area 1.44m<sup>2</sup>

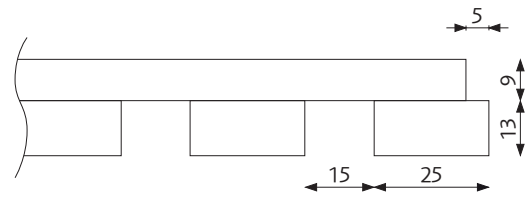

Default panel

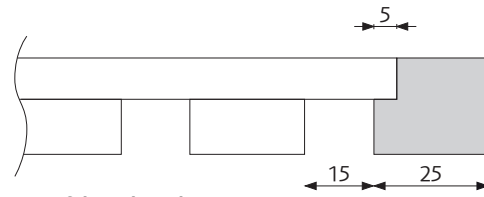


Cut felt with end strip

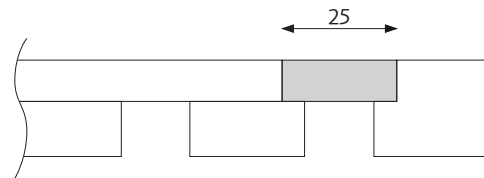


End strip with splicing strip


## OUR STANDARD RANGE



White Oak,  
RecoSilent Gray



White Oak,  
RecoSilent Black



Black Walnut,  
RecoSilent Black



Classic Ash,  
RecoSilent Gray



Classic Ash,  
RecoSilent Black




Classic Oak,  
RecoSilent Gray



Classic Oak,  
RecoSilent Black



Rustic Natural Oak,  
RecoSilent Black



Walnut,  
RecoSilent Black



Rustic Smoked Oak,  
RecoSilent Black



Diamond Ash,  
RecoSilent Gray



Diamond Ash,  
RecoSilent Gray



Rustic Antique Oak,  
RecoSilent Black



Rustic Grey Oak,  
RecoSilent Black



Black Diamond Ash,  
RecoSilent Black

# Ribbon-Wood

# WALLRIBBON



Diamond Ash,  
RecoSilent White



Diamond Ash,  
RecoSilent White



Diamond Ash,  
RecoSilent Gray



Diamond Ash,  
RecoSilent Black



Diamond Walnut,  
RecoSilent Black

## ACCESSORIES



Assembly adhesive



Mounting screw



Joint strip



LED-strip



Closing lists

